
FOR APPROVAL - NOT FOR CONSTRUCTION

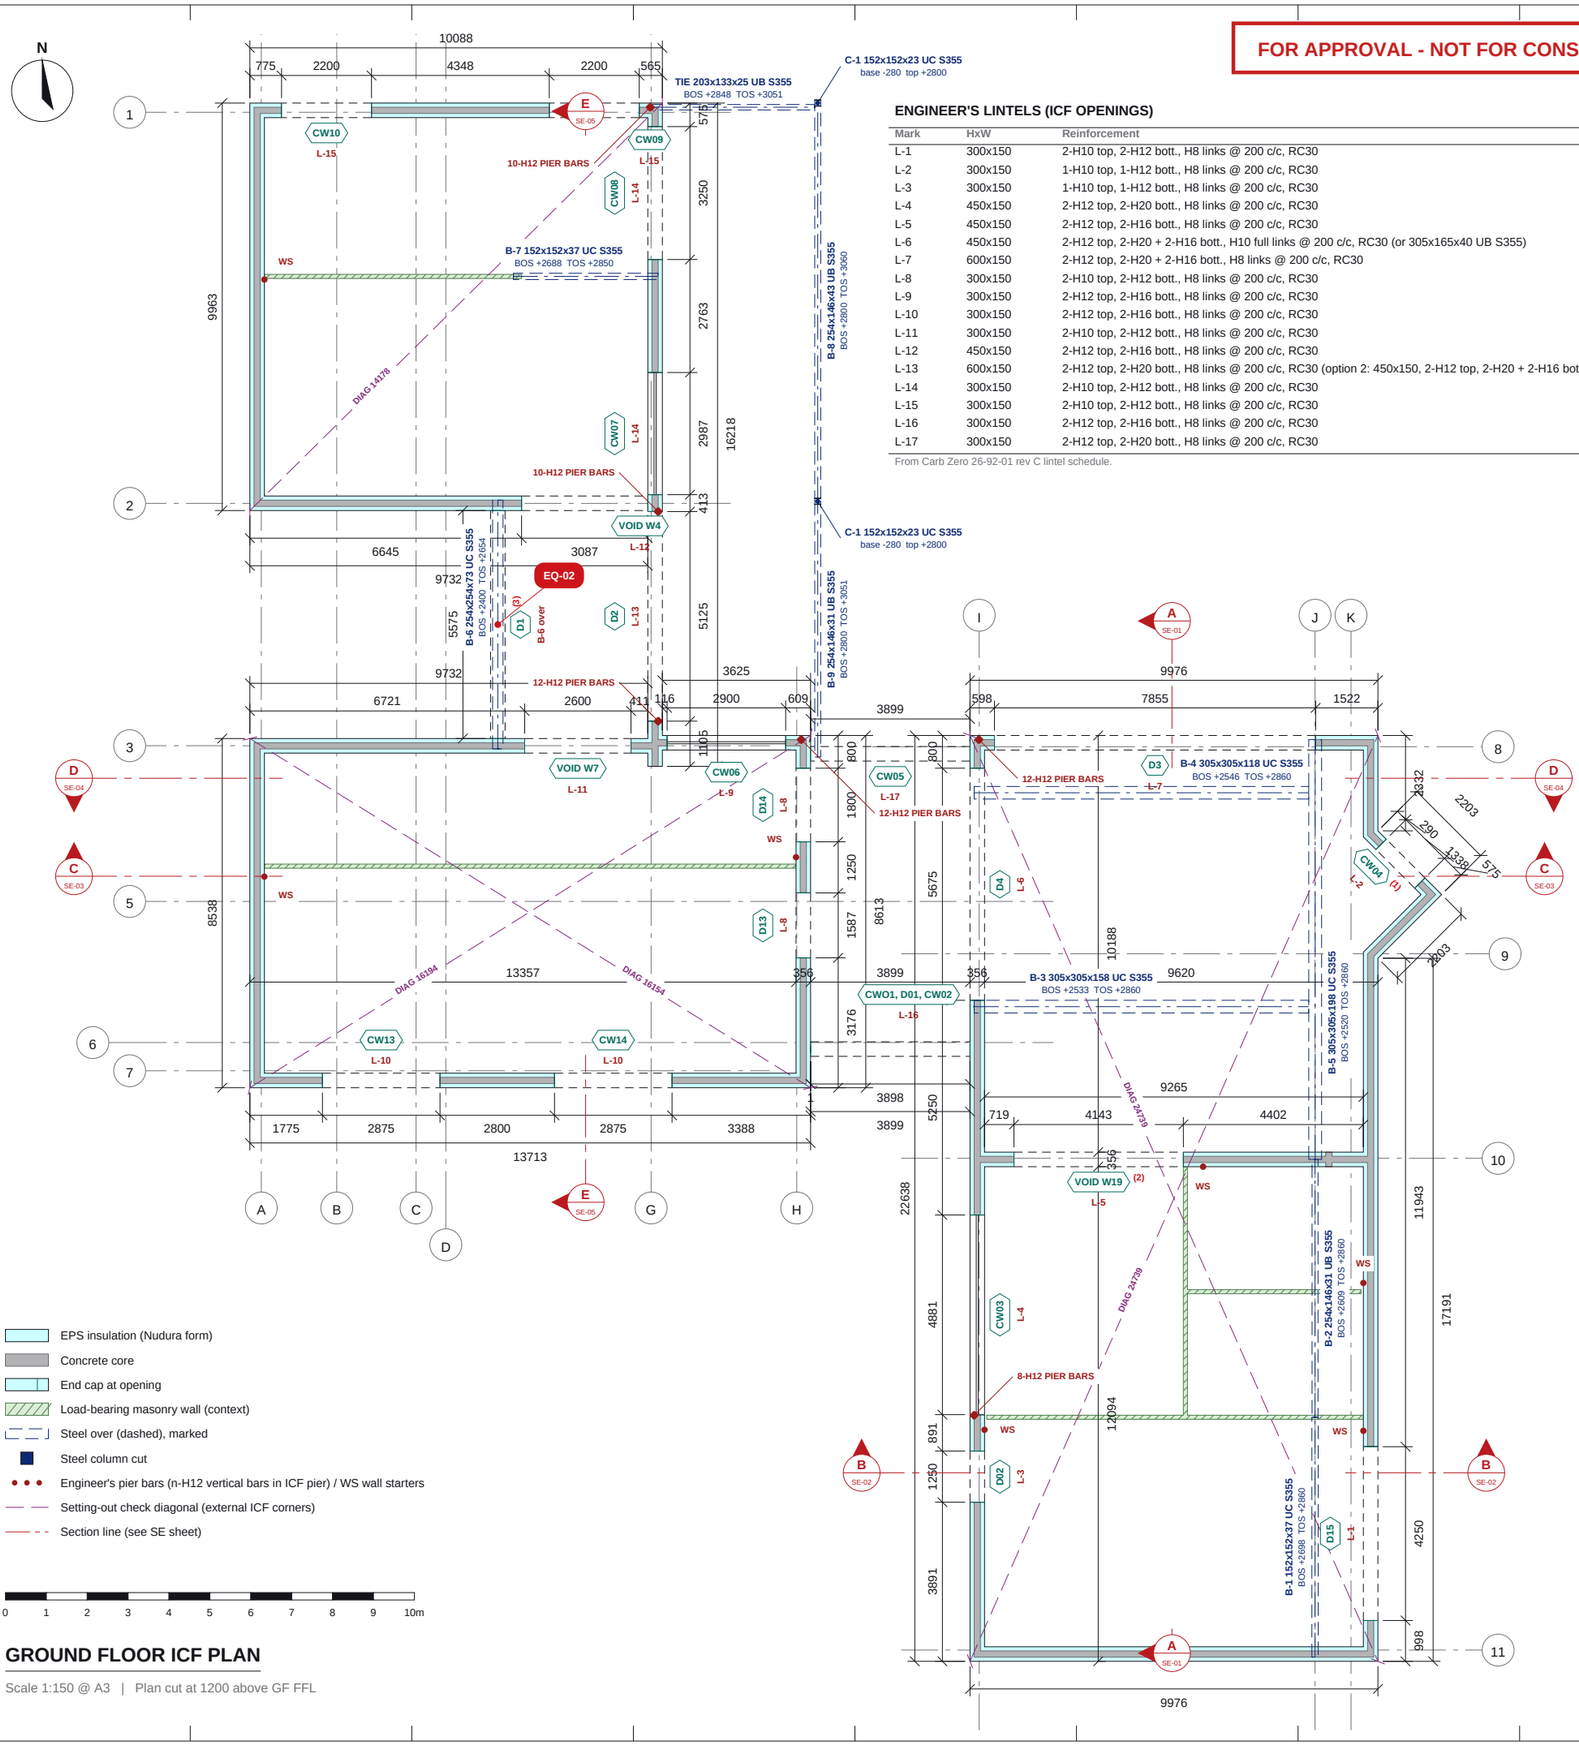

EPS insulation (Nudura form)
Concrete core
End cap at opening
Load-bearing masonry wall (context)
Steel over (dashed), marked
Steel column cut
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

0 1 2 3 4 5 6 7 8 9 10m

GROUND FLOOR ICF PLAN

Scale 1:150 @ A3 | Plan cut at 1200 above GF FFL

ENGINEER'S LINTELS (ICF OPENINGS)

Mark	HxW	Reinforcement
L-1	300x150	2-H10 top, 2-H12 bott., H8 links @ 200 c/c, RC30
L-2	300x150	1-H10 top, 1-H12 bott., H8 links @ 200 c/c, RC30
L-3	300x150	1-H10 top, 1-H12 bott., H8 links @ 200 c/c, RC30
L-4	450x150	2-H12 top, 2-H20 bott., H8 links @ 200 c/c, RC30
L-5	450x150	2-H12 top, 2-H16 bott., H8 links @ 200 c/c, RC30
L-6	450x150	2-H12 top, 2-H20 + 2-H16 bott., H10 full links @ 200 c/c, RC30 (or 305x165x40 UB S355)
L-7	600x150	2-H12 top, 2-H20 + 2-H16 bott., H8 links @ 200 c/c, RC30
L-8	300x150	2-H10 top, 2-H12 bott., H8 links @ 200 c/c, RC30
L-9	300x150	2-H12 top, 2-H16 bott., H8 links @ 200 c/c, RC30
L-10	300x150	2-H12 top, 2-H16 bott., H8 links @ 200 c/c, RC30
L-11	300x150	2-H10 top, 2-H12 bott., H8 links @ 200 c/c, RC30
L-12	450x150	2-H12 top, 2-H16 bott., H8 links @ 200 c/c, RC30
L-13	600x150	2-H12 top, 2-H20 bott., H8 links @ 200 c/c, RC30 (option 2: 450x150, 2-H12 top, 2-H20 + 2-H16 bott., H10 links)
L-14	300x150	2-H10 top, 2-H12 bott., H8 links @ 200 c/c, RC30
L-15	300x150	2-H10 top, 2-H12 bott., H8 links @ 200 c/c, RC30
L-16	300x150	2-H12 top, 2-H16 bott., H8 links @ 200 c/c, RC30
L-17	300x150	2-H12 top, 2-H20 bott., H8 links @ 200 c/c, RC30

From Carb Zero 26-92-01 rev C lintel schedule.

GROUND FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
CWO1, D01, CW02	3898	2400	0	+2400	L-16
CW03	4881	1500	+900	+2400	L-4
CW04 (1)	1338	2140	-20	+2120	L-2
CW05	3899	2400	0	+2400	L-17
CW06	2900	2200	+200	+2400	L-9
CW07	2987	1800	+600	+2400	L-14
CW08	3250	2400	0	+2400	L-14
CW09	2200	2400	0	+2400	L-15
CW10	2200	2200	0	+2200	L-15
CW13	2875	2400	0	+2400	L-10
CW14	2875	2400	0	+2400	L-10
D1 (3)	5575	2400	0	+2400	B-6 over
D2	5125	2400	0	+2400	L-13
D02	1250	2400	0	+2400	L-3
D3	7855	2400	0	+2400	L-7
D4	5675	2400	0	+2400	L-6
D13	1587	2400	0	+2400	L-8
D14	1800	2400	0	+2400	L-8
D15	4250	2060	0	+2060	L-1
VOID W19 (2)	4143	2070	0	+2070	L-5
VOID W4	3087	2400	0	+2400	L-12
VOID W7	2600	2400	0	+2400	L-11

Structural openings in the ICF; sill and head above GF FFL. (1) CW04: head lowered from +2355 to take L-2 (300) under the +2420 wall top. (2) VOID W19: head lowered from +2120 to take L-5 (450) under the +2520 wall top. (3) D1: height = clear under B-6 (BOS +2400); ICF open to +2654 with B-6 in the head (EQ-02). VOID = subtract cut in the ICF (no end caps / lintel buck modelled).

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
B-1	152x152x37 UC S355 with 10mm top plate	+2698	+2860
B-2	254x146x31 UB S355 with 10mm top plate & 200x100x10 ledger angle one side	+2609	+2860
B-3	305x305x158 UC S355 with 200x100x10 ledger angles both sides	+2533	+2860
B-4	305x305x118 UC S355 with 200x100x10 ledger angles both sides	+2546	+2860
B-5	305x305x198 UC S355 with 200x100x10 ledger angle one side	+2520	+2860
B-6	254x254x73 UC S355 with 200x100x10 ledger angle one side	+2400	+2654
B-7	152x152x37 UC S355 with 10mm bottom plate both sides	+2688	+2850
B-8	254x146x43 UB S355	+2800	+3060
B-9	254x146x31 UB S355	+2800	+3051
TIE	203x133x25 UB S355	+2848	+3051
C-1	152x152x23 UC S355	-280	+2800
C-1	152x152x23 UC S355	-280	+2800

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL (143.750 AOD). Sill / head = structural opening in the ICF.
3. EXT ICF150: 150mm core ICF walls, concrete grade C30, 10mm aggregate; polypropylene fibre reinforcement, dosage 2.5kg/m3; H16 dowel bars between lifts @ max 450mm c/c, 800mm long with 200mm embedment, resin fixed.
4. Lintel (L-n) and steel (B-n, C-1) marks from Carb Zero 26-92-01 rev C, which takes precedence. Red EQ tags = queries to the engineer on UKPCS-002-EQ-01 (click to open).
5. WS: wall starters between ICF & block wall. Frame cramps @ max 225mm vert. c/c. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.

REVISIONS

REV	DATE	DESCRIPTION
P01	14.09.26	Approval issue
P02	15.09.26	CW13 lintel L-18 revised to L-10 (engineer, EQ-01 closed)

Nudura™ BuildEase

CLIENT	PROJECT
Mr A Kirkpatrick	11767 Horrobin Farm, Turton

DRAWING TITLE

GROUND FLOOR ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE	DRAWN
1:150	A3	15.09.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-002-GA-01	P02

Do not scale. All dimensions in mm. Check all dimensions on site.