



OPTION B - FOR APPROVAL - NOT FOR CONSTRUCTION

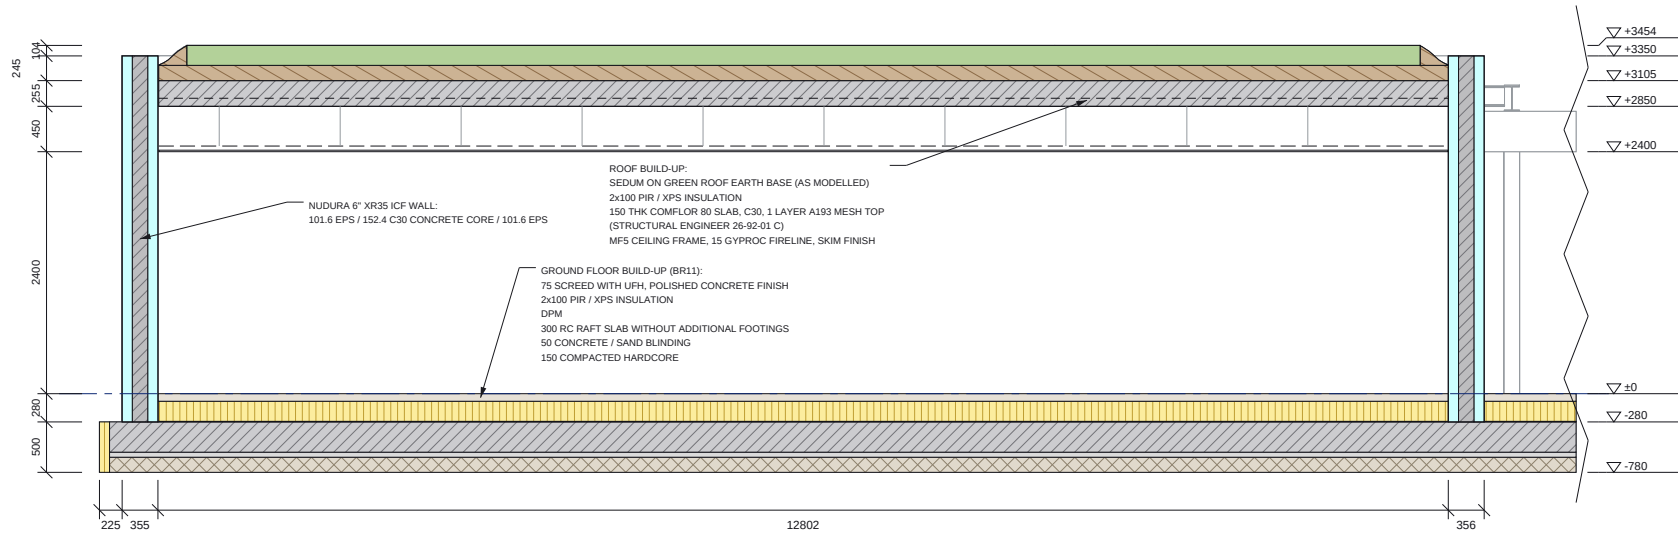

SECTION C-C (PART 1 OF 2)

Scale 1:75 @ A3 | Looking north; levels above GF FFL

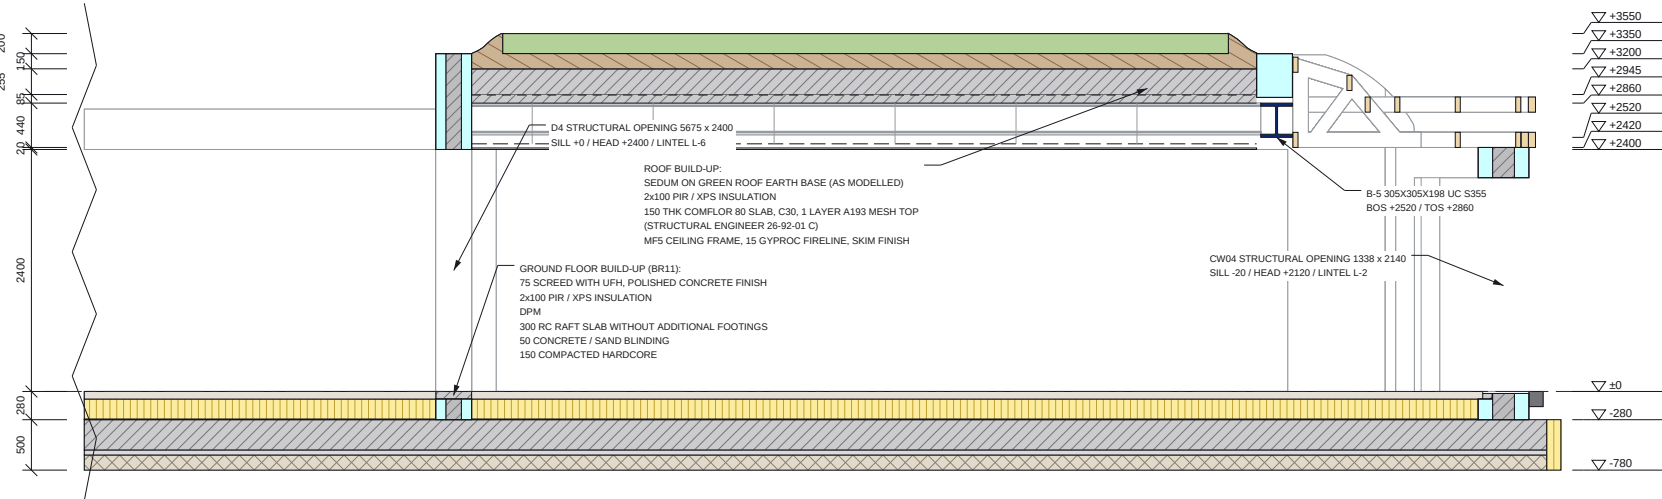

SECTION C-C (PART 2 OF 2)

Scale 1:75 @ A3 | Looking north; levels above GF FFL

- ICF EPS (cut)

ICF concrete core / RC (cut)

Steel (cut)

Screed
- Insulation (PIR / XPS, perimeter)

Blinding / hardcore

Roof earth

Sedum
- Masonry wall (cut)

Suspended ceiling (MF5 + 15 Fireline)

Comflor 80 deck (profile line)

Beyond the cut (line work)



SECTION C-C SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of hardcore	-780	142.970
underside of ICF / top of RC raft	-280	143.470
GF FFL	0	143.750
underside of suspended ceiling	+2400	146.150
top of ICF	+2420	146.170
B-5 BOS	+2520	146.270
roof slab soffit	+2850	146.600
underside of Comflor deck	+2860	146.610
roof slab soffit	+2945	146.695
top of roof slab	+3105	146.855
top of roof slab	+3200	146.950
top of ICF	+3350	147.100
top of roof build-up	+3454	147.204
top of roof build-up	+3550	147.300

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
B-5	305x305x198 UC S355 with 200x100x10 ledger angle one side	+2520	+2860

SECTION KEY

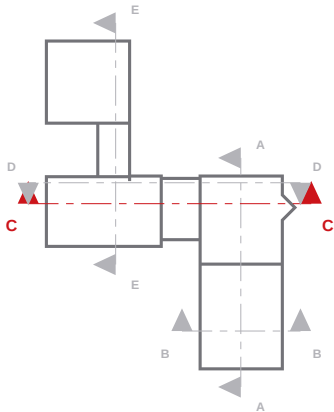

NOTES

- Section C-C on the line of the architect's section (BR13). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (143.750 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 C30 core + 101.6 EPS = 355.6. EXT ICF150: 150mm core ICF walls, concrete grade C30, 10mm aggregate; polypropylene fibre reinforcement, dosage 2.5kg/m3; H16 dowel bars between lifts @ max 450mm c/c, 800mm long with 200mm embedment, resin fixed.
- Ground floor (BR11): 75 screed with UFH / 200 PIR-XPS / DPM / 300 RC raft slab without additional footings / 50 blinding / 150 compacted hardcore; 100 perimeter insulation outside the ICF. Thresholds: ICF cut to -75 under the screed, concrete infill, ACO drain (size assumed 100x150).
- Roof: 150 thk Comflor 80 slab, C30, 1 layer A193 mesh top (26-92-01 C); green roof build-up (earth + sedum) as modelled; waterproofing to specialist design. Timber roof over the east wall to specialist supplier design. Comflor 80 deck drawn to the architect's profile (80 deep, 300 pitch) on the bearing steel / walls; MF5 suspended ceiling, 15 Gyproc Fireline, FFL to underside 2400 (BR11-13), drawn only.
- Steel marks, BOS / TOS: Carb Zero 26-92-01 rev C. See UKPCS-002-GA-01B / EL-01B / EL-02B.

REVISIONS

REV	DATE	DESCRIPTION
P01	15.09.26	Approval issue - Option B: external ICF 100mm in from slab edge

CLIENT

Mr A Kirkpatrick

PROJECT

11767 Horrobin Farm, Turton

DRAWING TITLE

SECTION C-C

ICF section with levels and build-ups

SCALE

1:75

SIZE

A3

DATE

15.09.26

DRAWN

TS

STATUS

FOR APPROVAL

DRAWING No.

UKPCS-002-SE-03B

REV

P01